

## AIRIUS MOUNTING GUIDELINES - Wall Mount - Models 10, 15 & 25 (Long & Short Nozzle)

 $(\cdot)$   $(\cdot)$ Cord **Unistrut or Ceiling Beam PUREAIR PHI SERIES** Secured 230 V Plug (single phase) Cable tie 5-Core Fan Motor & NPBI<sup>™</sup> Power Cable **Airius Wall Mount** 300 VAC Rated Cord Furnished 1.2m (4ft) Cable tie (Can be controlled by an On/Off switch or Airius Speed Controller) Intake Airius PureAir PHI Air & Fan power supply. To speed controller, switch or mains. Surface Purification Fan Earth Dimensions NPBI<sup>™</sup> power supply. N Direct to mains. 220mm Wiring Diagram 32mm Wall Mount must be installed using appropriate fixings Wall for surface (Not supplied) **Exhaust** 50mm 220mm **FOR BEST EFFICIENCY** the Airius PureAir Destratification Fan should be securely installed as close as possible to **I** 14.5mm the ceiling. The Airius air column should have an Wall |||| unobstructed passage to the floor. The Airius unit should not be mounted directly in front of heat ducts, vents or H 3.8mm near any high heat source.

Holwell Farm, Cranborne Dorset BH21 5QP E: airflow@airius.co.uk W: www.airius.co.uk Office: +44 (0)1202 554200 Fax: +44 (0)1202 554396 AIRIUS<sup>®</sup>, AIR PEAR<sup>®</sup>, and THE THERMAL EQUALIZER<sup>®</sup> are trademarks of Airius, LLC, registered in the U.S. and in some countries abroad. Other trademarks pending in the U.S. and abroad.


SOLD SEPERATELY





## AIRIUS MOUNTING GUIDELINES - Wall Mount - Models 10, 15 & 25 - Angled (Long & Short Nozzle)

**SOLD SEPERATELY** 

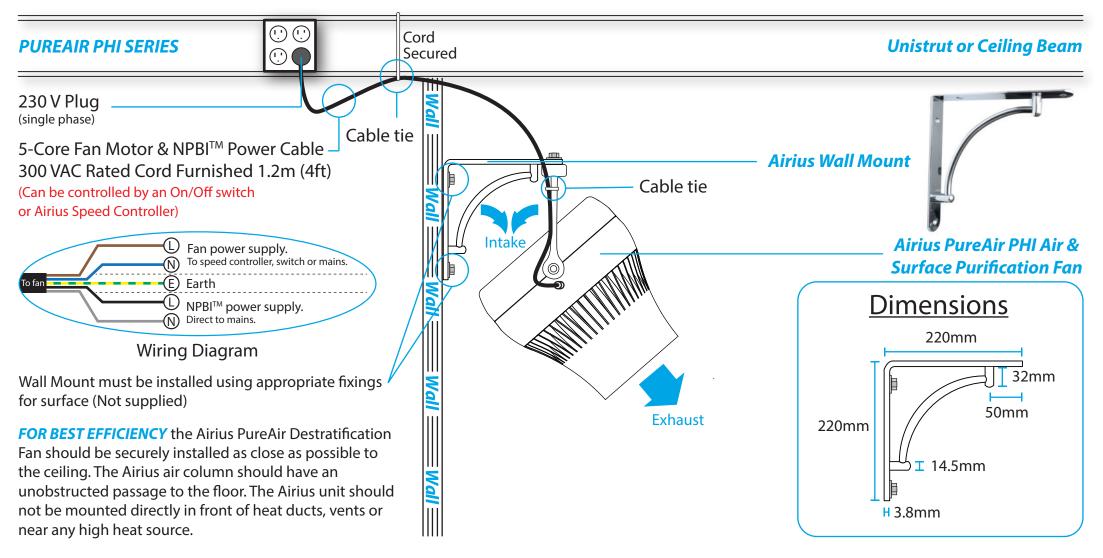

Holwell Farm, Cranborne Dorset BH21 5QP E: airflow@airius.co.uk W: www.airius.co.uk Office: +44 (0)1202 554200 Fax: +44 (0)1202 554396 AIRIUS<sup>®</sup>, AIR PEAR<sup>®</sup>, and THE THERMAL EQUALIZER<sup>®</sup> are trademarks of Airius, LLC, registered in the U.S. and in some countries abroad. Other trademarks pending in the U.S. and abroad.